


The Beiter NOCK

Since its appearance on the market, the world-wide patented Beiter Nock has become the standard in archery. It was the first Insert Nock and later Outsert Nock for target archers. Main features of Beiter Nocks, that distinguish them from other makes are:




- ⇒ Each Nock size has only one single mould. This offers highest precision and lowest tolerances. Every single Nock of one size comes out of the same mould.
- ⇒ The Nock does not pinch on the nocking point, it rests there with a spring effect. The working life is much longer and, very important, the Beiter Nock guarantees constant release from the bowstring, shot after shot.
- ⇒ The Beiter Nock can be shot without problem with all known nocking points; but the Beiter nocking point is the ideal partner for it. If used together, they avoid the arrow nocking out of the string at full draw and have ideal gliding surfaces.
- ⇒ Since it has been on the market, the Beiter Nock has been used by most Medallists at the Olympic Games, World Championships and other major Championships world-wide.

Nockbed Sizes		#1	#2	#3	
	A	4.40	5.00	5.30	mm
		.172	.196	.208	inches
		2.70	3.00	3.20	mm
		.106	.118	.126	inches
	B	2.20	2.50	2.70	mm
		.086	.098	.106	inches

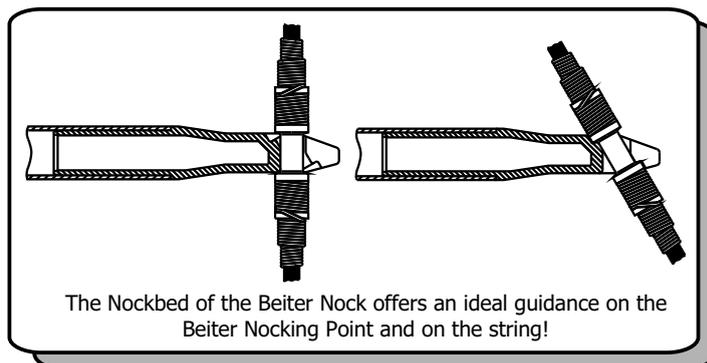

HINTS AND GENERAL INFORMATION:

- ⇒ The Beiter Nock is asymmetric, to adapt perfectly to the asymmetric drawn string. To ensure the Nock is placed correctly, see that the notch for the nocking point, looks to the front.
- ⇒ The bushing on the arrow shaft can easily be removed (by cutting the shaft approx. 1 cm or 1/2" from the end). Thanks to the direct fit, you reduce the tolerances to a minimum!
Use the Beiter Deburring Tool to edge-off the end of the shaft. Clean the cut surface of aluminum and aluminum-carbon shafts, before inserting the nock.
- ⇒ Do not use any solvents or solvent containing glues on Beiter Nocks. Install the nocks after cleaning the shaft and introducing the point.
- ⇒ Do not glue Beiter Nocks!
- ⇒ If the shaft diameter is a few hundredths of millimeter too big and the nock fits too loose, don't glue it! Compensate the gap with a small strip of teflon tape. (look at the left drawing on the bottom)
- ⇒ To install, remove or turn a Beiter Nock, use the Beiter Push'n'Pull: it gives a better grip and works as a small lever.

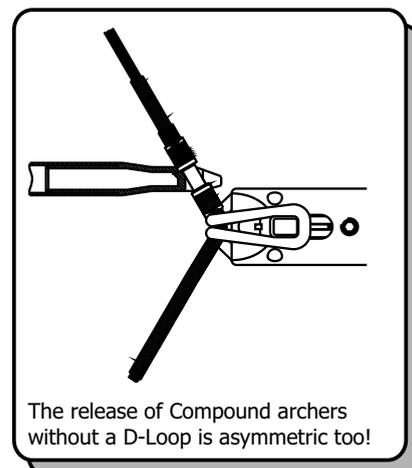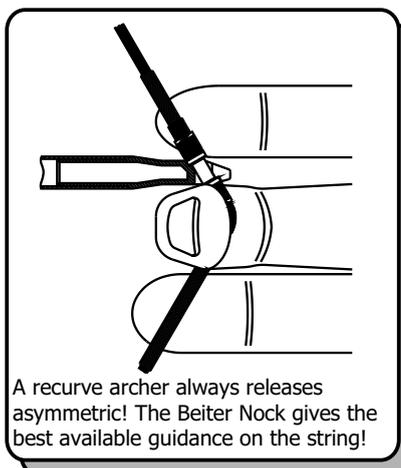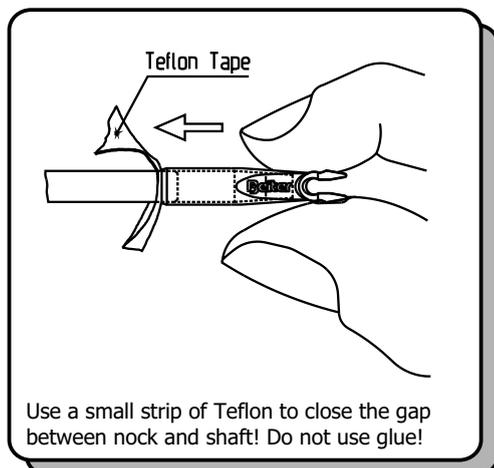

The Beiter HUNTER-NOCK

FEATURES:

The Beiter Hunter Nock was designed for Compound Archers with D-Loop. Hunter Nocks are "symmetric" because only with this shooting style release and nock are in one line, that means this is the only symmetric way to shoot in archery.

- ⇒ Each Nock size has only one single mould. This offers highest precision and lowest tolerances. Every single Nock of one size comes out of the same mould.
- ⇒ The Nock does not pinch on the nocking point, it rests there with a spring effect. The working life is much higher and - very important - the Beiter Nock guarantees constant release from the bowstring, shot after shot!
- ⇒ The Beiter Nock can be shot without problem with all known nocking points; but the Beiter nocking point is the ideal partner for it, having ideal gliding surfaces.

BEITER HUNTER NOCKS													
Model	diam. in mm	fit for	Weight (grams)	Weight (grains)	Colour								
					#10	#20	#21	#30	#35	#57	#61	#71	#89
					fl.red	fl.green	heavy yellow	fl.orange	heavy orange	heavy green	black	white	heavy pink
Nockbed 2 - Large Groove													
3,98	3,98	Vector 480 & 530, Cartel Triple 300-700,...	0,47	7,231			●		●	●	●	●	
12	4,25	ACE, Uni-System, ACC-00, Navigator, ...	0,49	7,538	●	●	●	●	●	●	●	●	●
19	6,25	Super-Uni- System, SuperSwedge, PSE CF, Gold Tip 3D Pro. BlackHawk Vapor...	0,70	10,769	●	●	●	●	●	●	●	●	●
19-620	6,20	C.Xpress CX, CT Cheetah, GT Camo, BH Vapor..	0,85	13,077	●	●		●			●	●	
2114	7,61	GT Series 22, 2114, 2115, 2117	1,11	17,138	●	●		●			●		
2213	8,04	2213	1,13	17,385	●	●		●			●		
2216	7,94	2216, PSE Equalizer	1,15	17,692	●	●		●			●	●	
23-808	8,08	C. Xpress CXL	1,19	18,308	●	●		●			●	●	
2312	8,61	2312	1,34	20,615	●	●		●			●	●	
2314	8,32	2314	1,26	19,385	●	●		●			●	●	
2315	8,48	2315	1,31	20,154	●	●		●			●	●	
25-886	8,86	C. Xpress Line Jammer	1,46	22,462	●	●		●			●	●	


Code-numbers:

The code for the Beiter Hunter Nock consists out of:

Product Group (NO)/Type/Nockbed (only #2)/H (Hunter)/Colour Code, e.g.

- **NO 12 2 H 71** -> Nock 12/2 Hunter, White #71

- **NO 2114 2 H 10** -> Nocke 2114/2 Hunter, Fluor. Red #10



Packing Unit:

Standard packing unit for Beiter Nocks is 100pcs., but dozens are also available.



HINTS AND GENERAL INFORMATION:

Many arrow shafts are coming with an installed **Super Uni Bushing**. These may be **easily removed** to use a **direct fit** Insert Nock.

Not only do you achieve the **highest possible precision**, but you also have **much less weight** on the end of the shaft, compared to the use with a Super Uni Bushing and the relative nock.

Here is a real example: A 19/2 Hunter Nock with Uni Bushing (2314) weights 1,45g/22,36grns. A Beiter Insert Nock 2314/2 Hunter weights **ONLY** 1,26g/19,345grns. **THIS IS A LOSS OF WEIGHT OF ~ 15%!**

And: the combination of Uni Bushing System and Nock is more expensive than 1 Beiter Nock!